

STAINLESS STEEL PEDESTAL MOUNTED BASIN (SS-E150)




Standards:

This eyewash station is designed to comply with ANSI Z358.1 and EN15154-1 & EN15154-2 standards, ensuring reliable performance and safety for emergency eye irrigation in industrial and hazardous work environments.

Features:

- Pedestal-mounted emergency eyewash for quick response in hazardous situations.
- Made from SS304 stainless steel for durability and corrosion resistance.
- Stainless steel bowl ensures long life and easy maintenance.
- Dual activation (flag handle + foot treadle) for fast and hands-free use.
- Equipped with 1/2" SS304 ball valve for reliable water control.
- Delivers 11.4 L/min (3 GPM) flow rate for effective flushing.
- Works within 0.2–0.8 MPa pressure range.
- Suitable for industrial and safety applications.

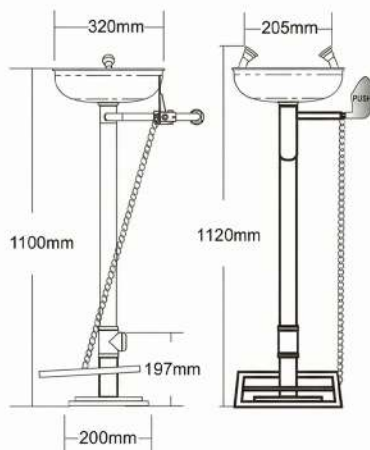

Specifications

Water Type	Material	Valve	Water Inlet	Water Outlet	Operating Pressure	Activation	Flow Rate	Weight	Packaging	Model
Clean or Leached Water	Stainless Steel 304 (Pipe, Fittings & Bowl)	1/2" SS 304 Ball Valve	1/2" External Thread	1-1/4" Internal Thread	0.2 – 0.8 MPa	Flag Handle or Foot Treadle	11.4 L/min (3 GPM)	G.W. 10 kg N.W. 9 kg	73 × 28 × 25 cm (1 set/carton)	SS-E150